


INLET AND OUTLET END ELEVATION

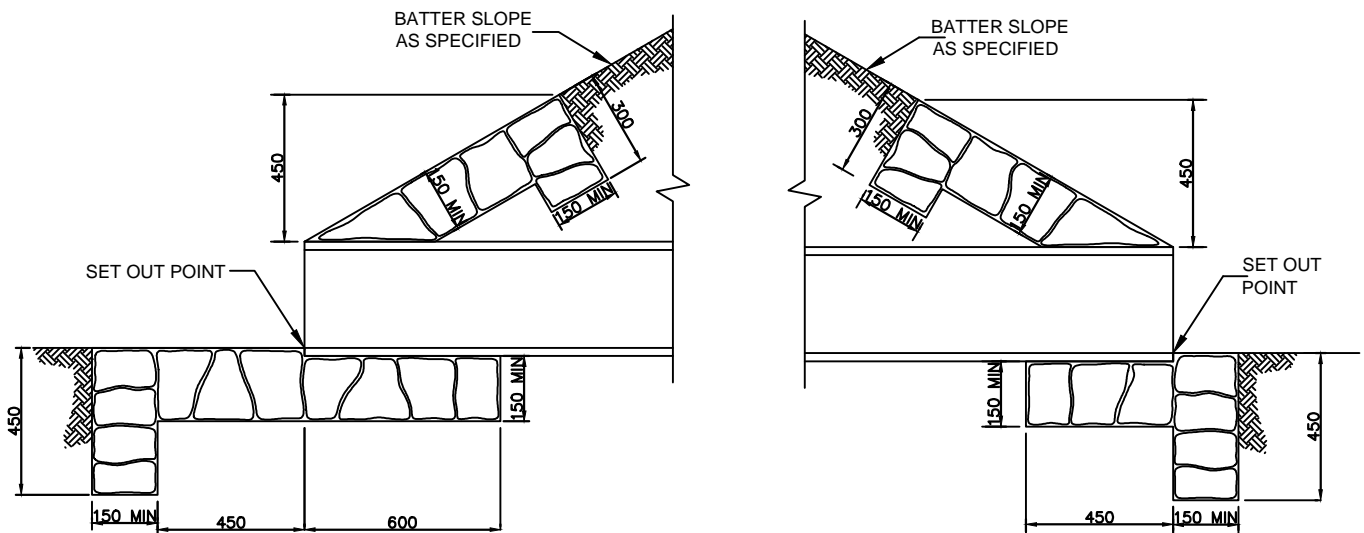

OUTLET SECTION

INLET SECTION

NOTES:

1. ROCKS SHALL BE SOUND, DENSE AND RESISTANT TO WEATHERING
2. UNLESS USED FOR FILLING IN, ROCK SHALL WEIGH BETWEEN 20 AND 70Kg WITH 60% WEIGHING AT LEAST 40Kg
3. GROUT SHALL BE 1 PART CEMENT TO 3 PARTS FINE SAND MIXED TO A STIFF CONSISTANCY
4. TOLERANCE ON ROCKS 50mm DEVIATION



GROUTED ROCK ENDWALL
(Not To Scale)
SUBJECT TO COUNCIL APPROVAL

DRAWN BY:
C.B.

CHECKED : L.T

DATE:
05.04.13

SD 029

REVISION	DATE	APPROVED
1.	4.06.2008	J.G.
2.	5.04.2013	L.T.
3.		