



PRECAST CONCRETE COVER CLASS 'D' AND SURROUND WITHIN 1M OF A VEHICLE CARRIAGEWAY. OTHERWISE CLASS 'B'.

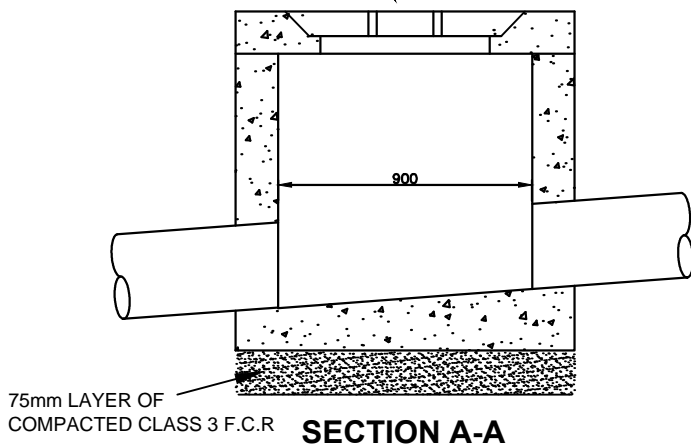

SECTION A-A

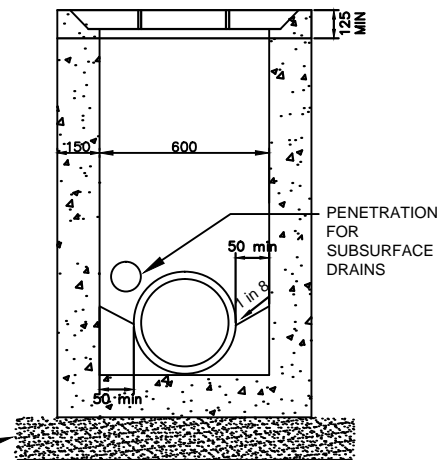

SECTION B-B

NOTES:

1. ALL WALLS TO BE MINIMUM 150mm THICK
2. THE TOP OF THE PIT SHALL MATCH THE FINISHED SURFACE LEVEL
3. CLASS B CIRCULAR CONCRETE INSERT AND PRECAST LID SHALL BE USED IN EASEMENTS AND RESERVES
4. CLASS D SHALL BE USED WHEN PIT IS LOCATED IN ROAD RESERVE WITHIN 1m OF VEHICLE CARRIAGEWAY
ALSO SEE VICROADS SD 1051
5. PROVIDE STEP IRONS FOR PIT DEPTH EXCEEDING 1.0m
6. CONCRETE STRENGTH 25MPa AT 28 DAYS



JUNCTION PIT
(Not to Scale)

DRAWN BY:
C.B.

CHECKED : L.T

DATE:
05.04.13

SD 014

REVISION	DATE	APPROVED
1.	27.9.2010	JG
2.	15.11.2011	C.B.
3.	5.04.2013	L.T.